



## CHAINLESS TE205 & TX205

### THE TOP-OF-THE-RANGE TRAILED CHAINLESS DOUBLE-BALE FEEDER

The Chainless trailed bale feeders are self-loading, suitable for feeding out any bale, round or square, and it maximizes feed use. Designed for medium to large operations. A Chainless trailed bale feeder minimizes feed waste by feeding out into narrow windrows to make the feed more accessible to animals and all but eliminate damage from hoof trampling, manure spoilage, and animals laying down on the feed. More efficient use of power, savings on machinery investment and faster bale feeding all add up to impressive fuel economy – made possible by the hydraulic drive system at the heart of every Hustler Chainless trailed bale feeder.

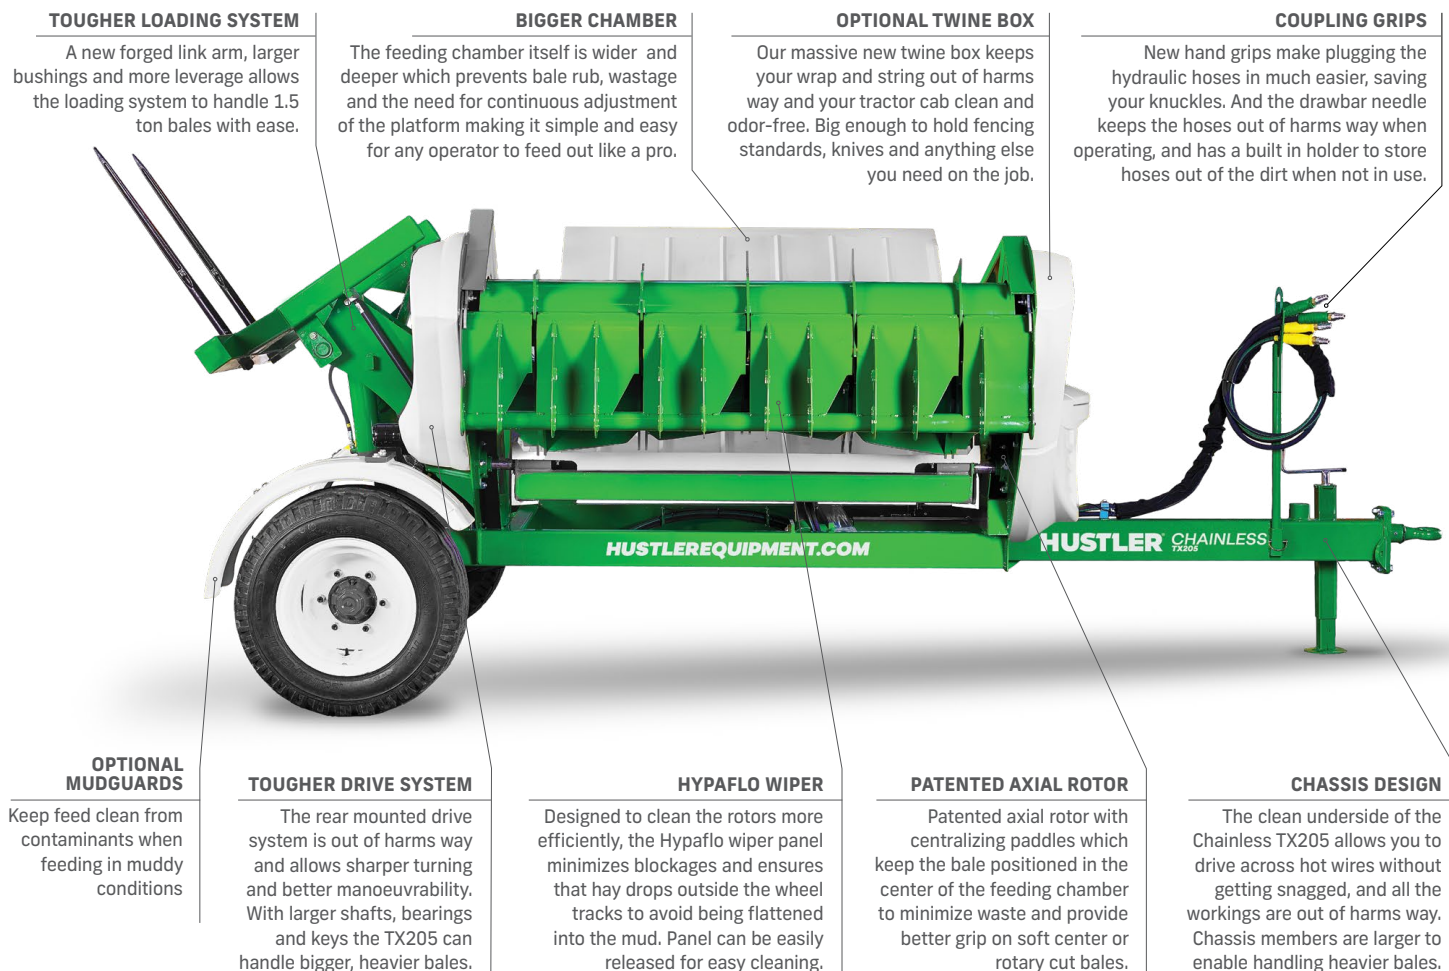

### LOADING SEQUENCE: CHAINLESS TX205, TOTAL CONTROL LOADING SYSTEM

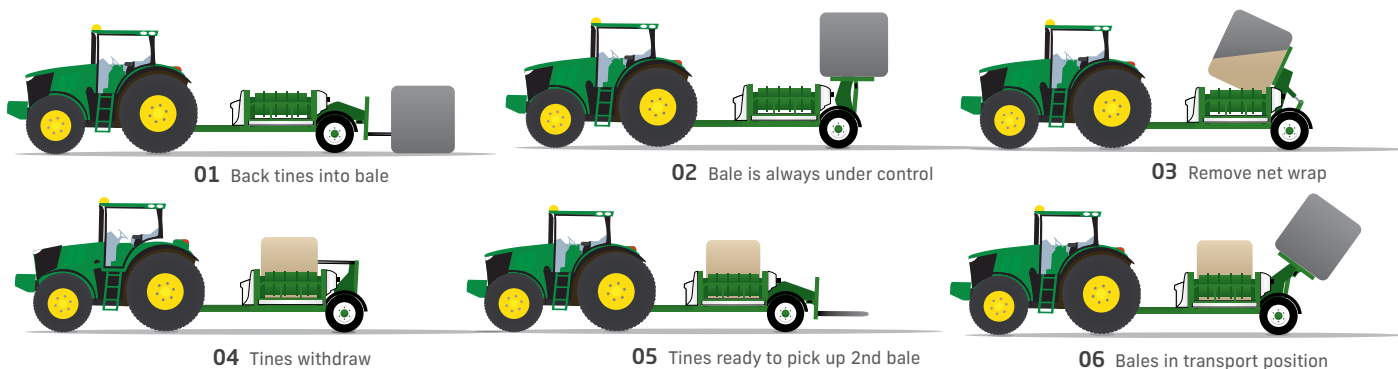

HUSTLEREQUIPMENT.COM  
0800 487 853

#### SPECIFICATIONS (TE205 | TX205)

**BALE SIZES ROUND:** Up to 5' x 6'  
**BALE SIZES SQUARE:** All sizes (over 6' long requires optional platform extension)  
**BALE WEIGHT:** Up to 1000 kg ea. | Up to 1500 kg ea.  
**UNIT WEIGHT:** 1160 kg | 1180 kg

**AXLES:** 6 stud, 60 mm square  
**WHEELS:** 10/75 x 15.3 | 13/55 x 16  
**GROUND CLEARANCE:** 443 mm  
**LENGTH:** 4467 mm  
**WIDTH:** 2410 mm  
**HEIGHT:** 1669 mm

**CAPACITY:** 2 bales (round or square)  
**TINES:** 2 x forged high-tensile  
**HYDRAULICS REQUIRED:** 2 x double-acting, (30-60 L/min), 2250-3000 psi  
**LOADING:** Patented Total Control self-loading system



# HUSTLER®

## CHAINLESS TE205 & TX205

