


CHAINLESS LX104 & LX105

MOUNTED CHAINLESS BALE FEEDERS

The world's most versatile bale processor can be mounted on a skid-steer loader, front loader, telehandler or 3 point hitch. The mounted Chainless bale feeder utilizes our patented X series feeding system which processes every type of round or square bale with ease, minimizing feed waste. The LX104 can handle up to 4' wide bales and the LX105 can handle up to 5' wide bales.

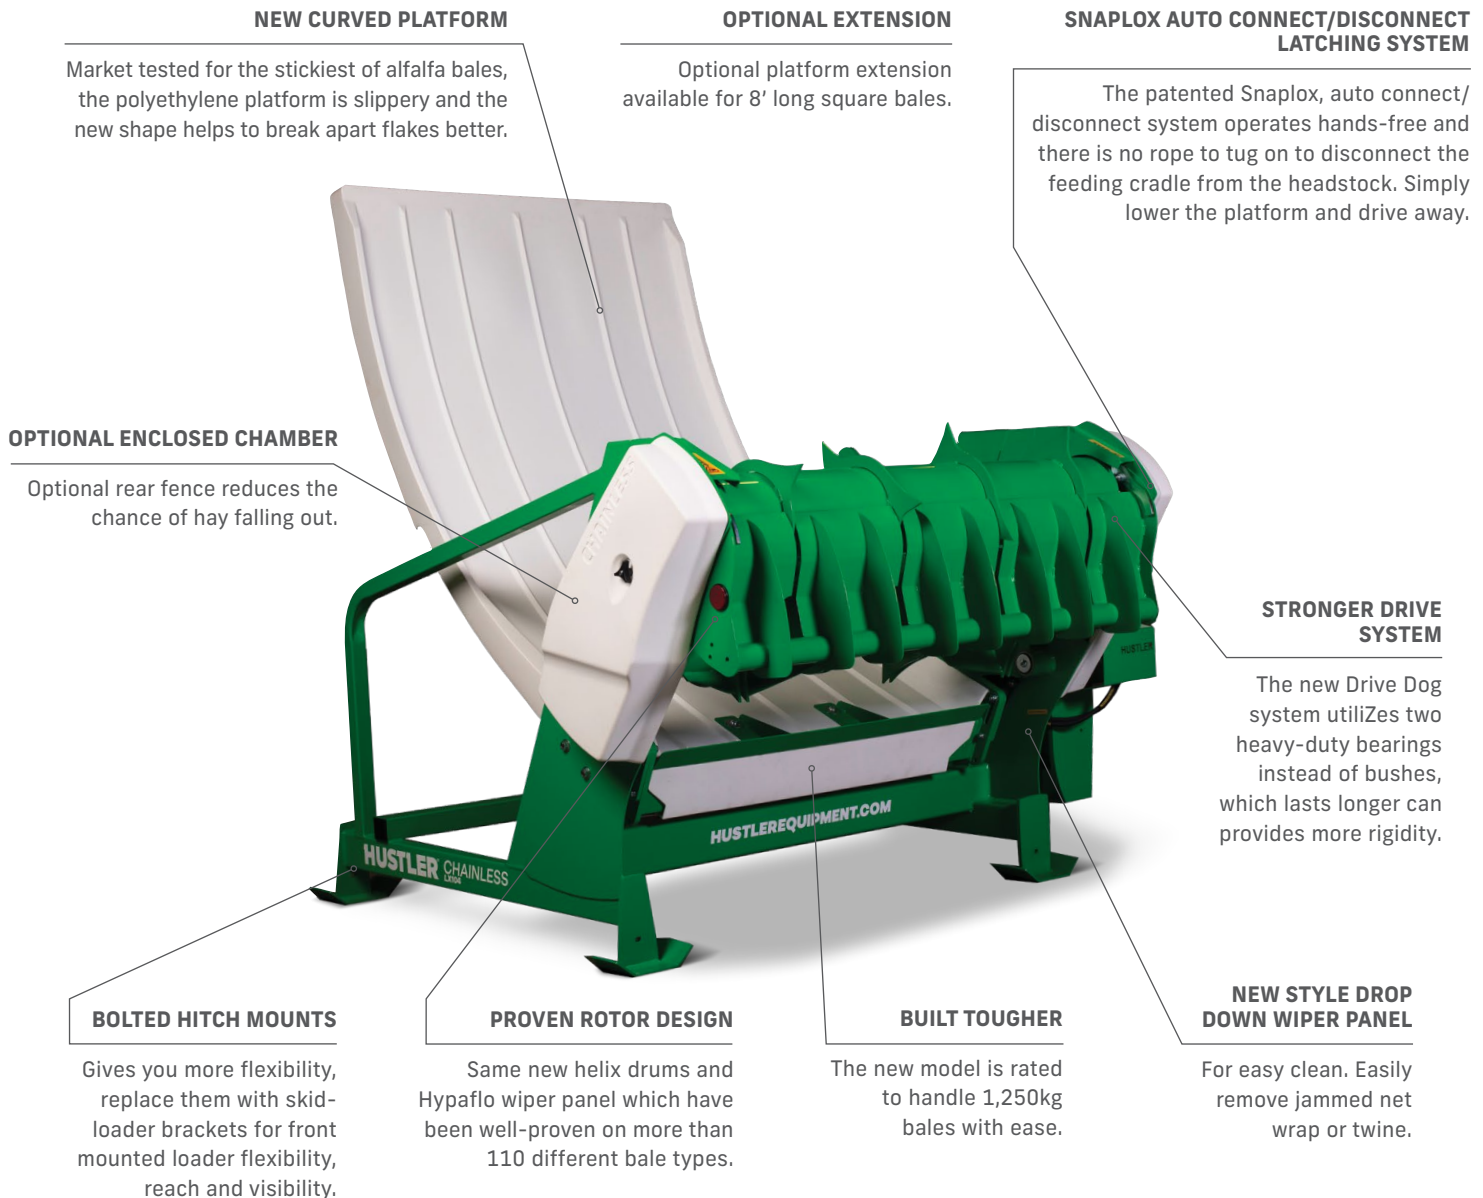

NEW CURVED PLATFORM

Market tested for the stickiest of alfalfa bales, the polyethylene platform is slippery and the new shape helps to break apart flakes better.

OPTIONAL EXTENSION

Optional platform extension available for 8' long square bales.

SNAPLOX AUTO CONNECT/DISCONNECT LATCHING SYSTEM

The patented Snaplox, auto connect/disconnect system operates hands-free and there is no rope to tug on to disconnect the feeding cradle from the headstock. Simply lower the platform and drive away.

OPTIONAL ENCLOSED CHAMBER

Optional rear fence reduces the chance of hay falling out.

STRONGER DRIVE SYSTEM

The new Drive Dog system utilizes two heavy-duty bearings instead of bushes, which lasts longer and provides more rigidity.

BOLTED HITCH MOUNTS

Gives you more flexibility, replace them with skid-loader brackets for front mounted loader flexibility, reach and visibility.

PROVEN ROTOR DESIGN

Same new helix drums and Hypaflo wiper panel which have been well-proven on more than 110 different bale types.


BUILT TOUGHER

The new model is rated to handle 1,250kg bales with ease.

NEW STYLE DROP DOWN WIPER PANEL

For easy clean. Easily remove jammed net wrap or twine.

SELF-LOADING IS QUICK, SAFE AND EASY AND THERE'S NO NEED TO TUG ON A ROPE!

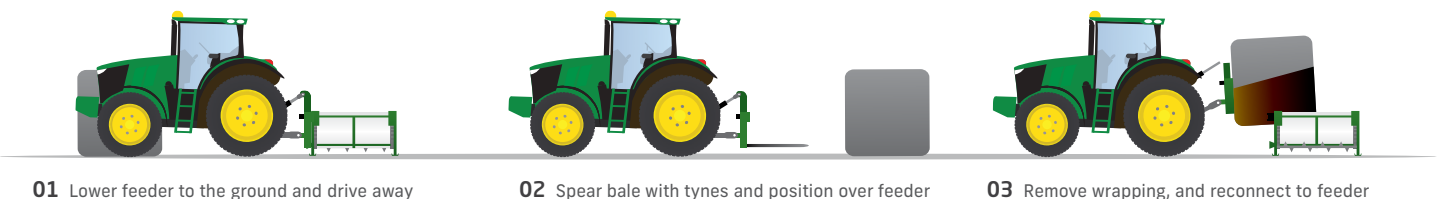

01 Lower feeder to the ground and drive away

02 Spear bale with tynes and position over feeder

03 Remove wrapping, and reconnect to feeder

SPECIFICATIONS (LX104 | LX105)

BALE SIZES ROUND: Up to 4' x 6' | Up to 5' x 6'
BALE SIZES SQUARE: All sizes (over 6' long requires optional platform extension)
BALE WEIGHT: Up to 1250 kg
UNIT WEIGHT: 680 kg | 800 kg

CAPACITY: 1 bale
LENGTH: 1931 mm | 2363 mm
MIN/MAX WIDTH: 1956 mm / 2693 mm
MIN/MAX HEIGHT: 1270 mm / 2591 mm
 1347 cm / 2591 mm

HYDRAULICS REQUIRED: 2 x double-acting, (30-60 L/min), 2250-3000 psi
LOADING: Patented Snaplox self-loading system
TINES: 2 x forged high-tensile

HUSTLER®

CHAINLESS LX104 & LX105

