




This is what happens when sharp design meets solid engineering

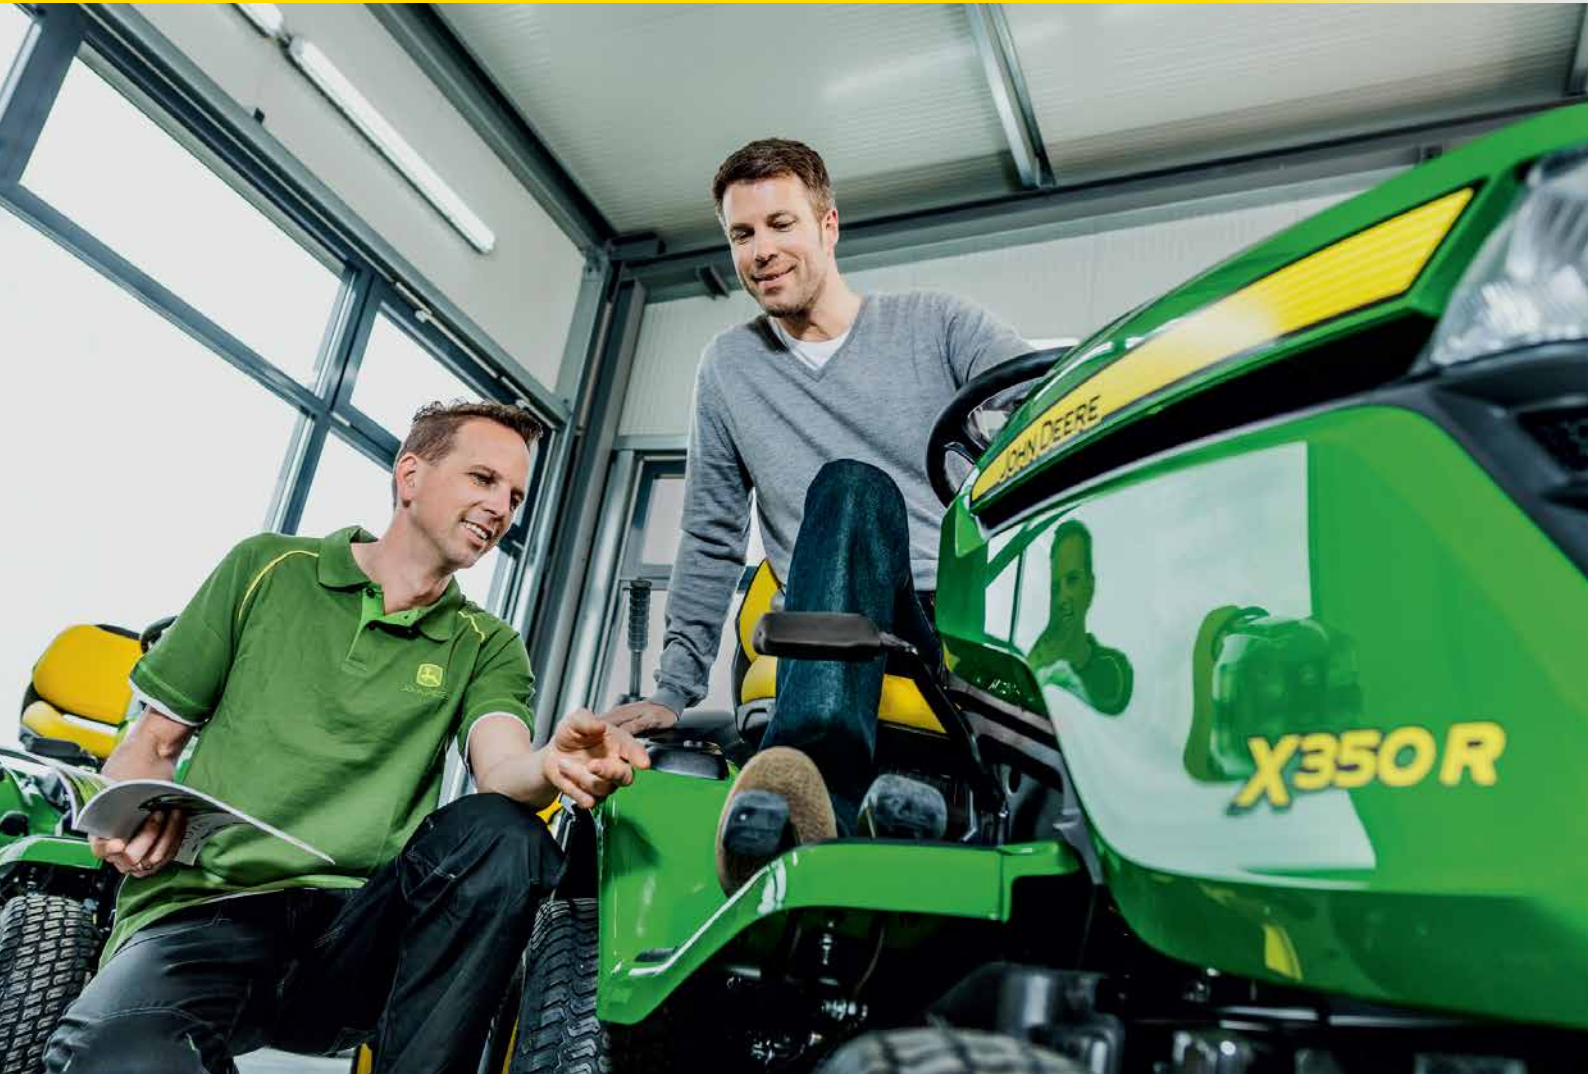

John Deere build Lawn Tractors one way; the right way. That is how they build all of their machines, you only have to look at a John Deere tractor straight in the eye and you'll see a strong family resemblance: bold lines, dynamically-spaced halogen headlights and a direct connection to their agricultural heritage.

Let's start with the cut. They have developed their unique cutting decks to give you the best cut every time, the range includes models that will mulch and bag the grass too. Their stamped deck design completely lifts the grass for a precise, even cut. You can find the precise mowing height you want every time. thanks to the 1/4-inch height of cut adjustment.

And then there's the legendary John Deere durability. You'll get a solid, one-piece, 12-gauge frame that's robotically welded to provide maximum strength. The durable features don't stop there: heavy duty crankshafts, a cast-iron front axle and a high quality engine are proof that John Deere lawn tractors are made tough right from the start.

That's how we run. And nothing runs like a Deere.

The proof is in the POWER



QUALITY JOHN DEERE ENGINES

It all starts with John Deere engines, manufactured exclusively for John Deere by Briggs & Stratton and Kawasaki, which include features like heavy duty crankshafts and a high-capacity filtering system. You have your choice of single cylinder engines or V-twin designs with greater torque and lower vibration.



EDGE CUTTING SYSTEM

The high volume precision cut edge decks are stamped out of high grade steel with a rounded design for maximum strength and superior cut quality. With the lowest cut height around and the ability to adjust 1/4" at a time, you will get the best cut every time. The convenience of a wash port means that cleaning is a breeze too.



GREASABLE CAST IRON FRONT AXLE

The heavy duty greasable front axles are constructed from solid cast iron for long life and reliability.



CHASSIS STRENGTH

The John Deere range are built on a solid 1 piece frame that is robotically welded and constructed from 12 gauge steel for durability in all conditions.



BLADES

Made from high carbon Nickel Alloy steel which is extremely hard and resistant to wear and breakage. By ensuring blades do not flex, you can be assured of the perfect cut every time.



TWIN TOUCH TRANSMISSION

The Twin Touch™ automatic transmission lets you easily change from forward to reverse with two-pedal foot control for effortless speed and direction changes.

100 SERIES

Ride on Lawn Mowers



Comfortable, affordable and easy to use, the S100 ride-on mowers are built in Greenville, Tennessee. With the John Deere Easy Change™ 30-Second Oil Change System on select models, ergonomic design across the lineup with a wide, and welcoming operator station, these mowers are ground breaking.



John Deere Easy Change
30 Second Oil Change System
*on selected models



The Redesigned Mower Deck Lifter



Side-By-Side Pedals

100 SERIES

Ride on Lawn Mowers

S100

17.5HP Briggs & Stratton engine
42" Cutting deck
Two pedal hydrostatic transmission
2 years/120hr limited warranty^



S110

19HP Briggs & Stratton engine
42" Cutting deck
Two pedal hydrostatic transmission
2 years/120hr limited warranty^



S120

22HP Briggs & Stratton V Twin engine
42" Cutting deck
Two pedal hydrostatic transmission
2 years/120hr limited warranty^



S130

22HP Briggs & Stratton V Twin
42" Cutting deck
Two Pedal Hydrostatic Transmission
2 years/120hr limited warranty^



S140

22HP Briggs & Stratton V Twin engine
48" Cutting deck
Two pedal hydrostatic transmission
2 years/120hr limited warranty^



The 100 Series Ride-on Mowers combine strength and reliability with yard-friendly simplicity, comfort and control.

With a choice of models and a wide range of features and options to choose from, the 100 Series has something for everyone. These robust ride-on mowers are engineered for years of trouble-free service and combine superb cut quality with outstanding ease of use.

*See page 22 for full specifications

CATCHER SERIES

Ride on Lawn Mowers

UP TO
4 YEARS
BUMPER-TO-BUMPER
WARRANTY
300 HOURS[^]



Mow and collect clippings in comfort and style with the easy to operate rear collection mowers. These dedicated rear discharge mowers feature high capacity baggers that can easily be emptied without leaving the seat and have an audible signal that alerts the operator when the rear bagger is full. A high blade speed and generous chute size allows efficient grass catching capabilities.



1/4" Adjustable Cutting Height



Greasable Cast Iron Front Axle



High Capacity Cutting Deck
With Washport



Optional Rear Deector

CATCHER SERIES

Ride on Lawn Mowers

X147R

16.5HP, Briggs & Stratton V Twin engine
36" Rear-discharge deck
Two pedal hydrostatic transmission
2 years/120hr limited warranty[^]



X167R

16.5HP, Briggs & Stratton V Twin engine
42" Rear-discharge deck
Two pedal hydrostatic transmission
2 years/120hr limited warranty[^]



X350R

21.5HP, V Twin Kawasaki engine
42" Edge™ rear-discharge/collect deck
Hydrostatic transmission
4 years/300hr limited warranty[^]



**Selected models across the John Deere Range are catcher compatible.
Talk to the team today about adding a catcher to your mower.**

[^]See page 23 for full specifications

300 SERIES

Ride on Lawn Mowers

4 YEARS
BUMPER-TO-BUMPER
WARRANTY
300 HOURS[^]



Designed for large lawns, these lawn tractors have all the power and comfort you need to get things done. The X300 Series models have impressive features and are easy to operate. With TwinTouch™ foot controls, industry leading ergonomics that make mowing easy and cruise control, mowing your lawn will never be a chore again.



The all-new Accel Deep mower deck is available for Select Series lawn tractors.



Twin Touch™ Hydrostatic With Cruise Control.



V Twin Kawasaki Engines



Optional Bagger Kit & Mulch Kits

300 SERIES

Ride on Lawn Mowers

X350

21.5HP, V Twin Kawasaki engine
42" or 48" cutting deck options
2 pedal hydrostatic transmission
Flywheel alternator
4 years/300hr limited warranty[^]



X350M

21.5HP, V Twin Kawasaki engine
42" mulching deck
2 pedal hydrostatic transmission
Removable rear gates
4 years/300hr limited warranty[^]



X380

23HP, V Twin Kawasaki engine
iTorque power system
48" or 54" cutting deck options
2 pedal hydrostatic transmission
4 years/300hr limited warranty[^]



X384 4WS

23HP, V Twin Kawasaki engine
48" cutting deck
2 Pedal hydrostatic transmission
4 wheel steering
4 years/300hr limited warranty[^]



*See page 24 for full specifications



500 SERIES

Ride on Lawn Mowers

4 YEARS
BUMPER-TO-BUMPER
WARRANTY
500 HOURS[^]



X500s mow where you need to go, and do heavy-duty work, too. Their wide stance enhances stability on hillsides and traction can be increased simply by pressing the foot-operated traction control. Heavy-duty frames work with ground-engaging equipment like tillers, and features like the on-board deck-leveling gauge assure a quality cut every time.



V Twin Kawasaki Engines



Twin Touch Transmission



Deluxe Seat



Attractive Design

500 SERIES

Ride on Lawn Mowers

X570

24HP, V Twin Kawasaki engine
48" or 54" Cutting deck options
Hydrostatic transmission
TwinTouch™ foot pedals
Difflock
4 years/500hr limited warranty^



X580

24HP, V Twin Kawasaki engine
54" Cutting deck
Hydrostatic transmission
HDAP rear tyres
Power Steering
Difflock
4 years/500hr limited warranty^



X590

25.5HP, V Twin Kawasaki engine
48" or 54" Cutting deck options
Hydrostatic transmission
EFI air cooled engine
Power Steering
Difflock
4 years/500hr limited warranty^



Mow with precision. Negotiate an incline. Till a garden.

*See page 24-25 for full specifications



700 SIGNATURE SERIES

Ride on Lawn Mowers



The John Deere Select™ Series X700 Ultimate Ride-On Mowers are designed and built heavy-duty to meet the needs of both property owners and commercial users. These X700's are heavy-duty, versatile machines, capable of mowing and landscaping large properties with challenging terrain.

With multiple models to choose from we are sure that we can match a mower to your large acreage or commercial operations. X700 Signature Series systems offer two drive options - a full time 4 wheel drive system or a 2-wheel drive system. Both feature a special standard Traction Assist foot operated control to get you out, up or over the tough spots.



Commercial 3 Cylinder Yanmar Diesel Engine



Twin Touch Foot Control



High Capacity Auto Connect Deck



Traction Control

700 SIGNATURE SERIES

Ride on Lawn Mowers

X750

24HP, Yanmar diesel engine
 54" or 60" auto connect cutting deck
 2 Pedal hydrostatic transmission
 2WD
 4 years/700hr limited warranty[^]



X758

24HP, Yanmar Diesel engine
 54" or 60" auto connect cutting deck
 2 Pedal hydrostatic transmission
 4WD
 4 years/700hr limited warranty[^]



There are multiple models and combinations of features that you can select in the 700 Select Series, talk to the team about what is the best for you.

Steering Wheel - Standard tilt steering adjusts to your height and delivers the ultimate in comfort.

Engine - Starting with the X730 high-performance EFI petrol engines and Tier 4 diesel engines offer torque and power to spare.

Make yourself comfortable - This premium, 2 piece, 53cm (21") high back seat offers suspension support and a lounge-chair-like function for exceptional comfort.



Mower Deck - The 122cm (48") Edge Xtra mower deck is perfect for narrow pathways and gate entrances, while our 137cm (54") and 152cm (60") high capacity decks provide a premium cut and are solid- stamped out of 9-gauge steel for toughness.

[^]See page 25 for full specifications

ZTRAK SERIES

Ride on Lawn Mowers



John Deere Residential ZTrak™ Mowers are designed with saving you time in mind. Steer using motion control levers, driven by two durable independent transmissions. These levers are effective over long, level tracks of land or around trees, shrubs and flower beds.

Mow well fast with our new Accel Deep™ Mower Decks, re-engineered to process taller grass at faster speeds. Run at ground speeds of 11.3km/h (7 MPH) - 14.5km/h (9 MPH). Among the fastest in the industry.



Heavy Duty Transmission



1/4" Adjustable Cutting Height



High Capacity Accel Deep™ Mower Deck



Deliver new levels of cut quality, productivity, cleanliness, durability and versatility.

ZTRAK SERIES

Ride on Lawn Mowers

Z335E

20HP, V Twin Briggs & Stratton engine
42" Cutting deck
Hydro-gear transmission
Twin levers
2 Years/120hr limited warranty^



Z355E

22HP, V Twin Briggs & Stratton engine
48" Cutting deck
Hydro-gear transmission
Twin levers
2 Years/120hr limited warranty^



Z515E

24HP, V Twin Briggs & Stratton engine
48" or 54" Cutting deck options
Tuff Torq transmission
Twin levers
2 Years/120hr limited warranty^



Z530M

24HP, V Twin Kawasaki engine
48", 54" or 60" Cutting deck options
Tuff Torq transmission
Twin levers
4 Years/300hr limited warranty^



Z545R

25HP, Commercial EFI V Twin Briggs & Stratton engine
48", 54" or 60" Cutting deck options
Tuff Torq transmission
Twin levers
4 Years/300hr limited warranty^



*See page 26 for full specifications

ZTRAK SERIES - Easy Order (not stocked in branch)

Ride on Lawn Mowers

Z345M

22HP, V Twin Briggs & Stratton engine
 42" Cutting deck with optional MulchControl Kit
 Hydrostatic transmission
 Hand lever, optional foot lift
 1/4 inch height of cut adjustment
 2 years/120hr limited warranty[^]



Z345R

22HP, V Twin Briggs & Stratton engine
 42" Cutting deck with optional MulchControl Kit
 Hydrostatic transmission
 Foot lift and hand lever standard
 1/4 inch height of cut adjustment
 2 years/120hr limited warranty[^]



Z355R

22HP, V Twin Briggs & Stratton engine
 48" Cutting deck with optional MulchControl Kit
 Hydrostatic transmission
 Comfortable armrests
 Floor mats for extra protection
 2 years/120hr limited warranty[^]



Z365R

24HP, V Twin Briggs & Stratton engine
 48" Cutting deck with optional MulchControl Kit
 Hydrostatic transmission
 Easy Change™ 30-Second Oil Change System
 Easy to use foot pedal mower deck lift
 2 years/120hr limited warranty[^]



Z375R

25HP, V Twin Briggs & Stratton engine
 54" Cutting deck with optional MulchControl Kit
 Hydrostatic transmission
 Easy to use foot pedal mower deck lift
 Floor mats for extra protection
 2 years/120hr limited warranty[^]



[^]Enquire at your local branch for full specifications

Z700 / Z900 SERIES

Ride on Lawn Mowers



4 YEARS
BUMPER-TO-BUMPER
WARRANTY
750 HOURS[^]

Mow better, faster on a Z700 Series Zero-Turn Mower. High-capacity PRO Mower Decks with commercial-grade reinforcements and speeds up to 16 km/h let you mow quickly so you can move on to the next task.

Z720E

23HP, V Twin Kawasaki engine
 54" or 60" PRO deck options
 21" Seat
 Adjustable, 3-position foot platform
 4 Years/500hr limited warranty[^]



Z915E

25HP, V Twin Kohler engine
 54" or 60" PRO deck options
 Tuff-Torq Transmission
 Twin Levers
 4 Years/750hr limited warranty[^]



*See page 26 - 27 for full specifications

Commercial Machines



We're in the business of supporting your business.

Mowing and ground care needs are covered with the John Deere range of commercial machines. Whether you're a one-person operation or running an entire fleet of landscaping gear, our team here at Drummond & Etheridge will serve as a valuable extension of your team, helping you find the right equipment for the job, and guiding you through your financing, parts and service support options.

The John Deere commercial range delivers the best of both worlds; the latest technology combined with John Deere quality, durability, and support. There are machines and attachments for all range of applications including Gator side-by-side vehicles, Out Front Mowers, Commercial Ztrak Mowers, Compact Tractors, Compact Skid Steers and Compact Excavators.

If you need an attachment for your commercial machine, there are over 200 hard-working attachments and accessories ready to take on dozens of jobs. From backhoes to wheel rakes - these commercial-grade attachments, with the help of John Deere's unique iMatch 'Autohitch', Quick-Park™ loaders and drive over AutoConnect decks, are as easy to put on as a pair of your favourite gloves.

Commercial Machines

Gator Utility Vehicles

Touring. Fishing. Fencing. As sure as real work requires breaking a sweat, Gator™ Utility Vehicles are engineered to work and play as hard as you do. We've got the lineup to prove it. Choose between: Full-Size XUVs. The big boys, engineered for serious payloads with powerful engines and incredible rides. Mid-Size XUVs. True grit at a great price as well as exceptional comfort and performance. Recreational sports models can even go up to 85 km/h.



Compact Utility Tractors

Don't let the size of these tractors fool you, with powerful high torque engines, convenient automatic two pedal transmissions and a wide range of available attachments, these machines are the right choice. The line-up includes our 1, 2, 3 and 4 Family tractors ranging from 22 to 65 engine horsepower (16.5 to 48.5 kW). These tractors are the ideal choice for commercial and lifestyle users and come with a 6 Year or 2000 hour PowerTrain warranty (whichever comes first).



Ztrak Commercial Mowers

Made for customers who seek value, performance and efficiency the three Commercial ZTrack model groups ensure that we can meet the needs of every operation. With a turning radius that is effectively zero these mowers also have the option of a Mulch On Demand™ Mower Deck, allowing you to switch between mulching and side discharging without ever leaving your seat.



Compact Construction Equipment

Need comfortable compact construction equipment? Drummond & Etheridge supplies the latest solutions from John Deere construction including skid steers, compact excavators, wheel loaders, and compact track loaders. These machines are small and efficient while packing a powerful punch to get work done.



This Is How We Run

New Accel Deep™ Mower Deck

The all-new Accel Deep™ mower deck is engineered for excellence, literally from the ground-up. Its single piece stamped steel shell is specially shaped to maximize airflow for optimal quality to help you mow better, faster, and cleaner in 42, 48 and 54 inch cut widths. What makes the Accel Deep™ mower deck unique is its nearly 5-inch-deep shell that extends all the way around, and its smooth shape.

The deep shell maximises airflow to lift grass up for the most level cut possible. Even with the Mulch Control™ option, cut evenness is improved because the additional depth of the shell allows for continuous circulation, optimal re-cutting, and an even distribution of clippings.



Behind You All Season Long

From the moment you enter a John Deere Dealership, you can be assured you're getting the very best in customer support from a team member committed to working with you. Factory-trained service and parts professionals ensure that your equipment keeps working as hard as you do.

At Drummond & Etheridge we have a dedicated team of mower service technicians to look after our mower customers, meaning you are the first priority. The best equipment deserves the best in support and service, and with a John Deere dealer, you can be assured you will get both.

Collect & Deliver

We offer a collection and delivery service for your mower, so that getting your mower to us for servicing and repairs is easier than ever. Contact your local service department for more information or to book.

Home Maintenance Kit

Filters, plugs and oil are packaged in convenient box. Be confident in genuine John Deere parts to keep your machine performing at its optimum.



Lawncare Attachments & Parts

Select from the John Deere range of optional attachments, service items & accessories to make your mower even more versatile and perform at its best for years to come.



Blade Sets
AM141034, AM141036



Complete Mower Decks



Front Bumper
BG204366



Ride-on Mower Cover
LP93917



Seat



Seat Covers
CPLP22074, LP92324, LP92334



Lawn Sweeper
CPLPSTS42JD



Trailers
CPLP21935, CPLPPCT10JD,
CPLPPCT17JD



79kg Fertiliser Spreader CPLPBS36JD



25 Gallon Sprayer
CPLP19479



45 Gallon Sprayer
CPLP20485



Lawn Roller
CPLPPRT36JD



Lawn Thatcherator
CPLPTA40JD



Spike Aerator & Spike Aerator & Spreaders
CPLPSAT40JD, CPLPAS40JD,
CPLPPA40JD



Single Furrow Plough
CPLPPP1200JD



Bagger System
BM21871, BM23634, BM21681,
BM21873, BM22144, BM21679,
BM21680, BM22697, BM21682,
BM14653, BM24333, BM20671,
BM21682, BM20714, BM24514.



Mulch Control System
BM24794, BM24993, BM24994



Mulch Cap
GY00115



Mulch Kits
BM21816, BM20007, BM20827,
BG20560, BM25257



Rear Deflector
BG20822, BM25065

Specifications

100 SERIES



	S100	S110	S120	S130	S140
Engine	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton
Model					
Horsepower	13.0 kW (17.5 hp)	14.2 kW (19.0 hp)	16.4 kW (22 hp)	16.4 kW (22 hp)	16.4 kW (22 hp)
Displacement	500 cc (30.5 cu. in.)	540 cc (33 cu. in.)	656 cc (40 cu. in.)	724 cc (44 cu. in.)	724 cc (44 cu. in.)
Cylinders	One	One	V-twin	V-twin	V-twin
Oil Filter	Traditional	Traditional	John Deere Easy Change™	John Deere Easy Change™	Traditional
Lubrication	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter
Cooling	Air	Air	Air	Air	Air
Fuel System					
Fuel Type	Unleaded petrol	Unleaded petrol	Unleaded petrol	Unleaded petrol	Unleaded petrol
Fuel Tank Capacity	9.08 L (2.4 gal)	9.08 L (2.4 gal)	9.08 L (2.4 gal)	9.08 L (2.4 gal)	9.08 L (2.4 gal)
Fuel Indication	Yes	Yes	Yes	Yes	Yes
Fuel Filter	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line
Electrical System					
Battery Voltage	12 V	12 V	12 V	12 V	12 V + optional 12 V outlet
Capacity	9 amp	9 amp	9 amp	9 amp	9 amp
Hourmeter	Standard	Standard	Standard	Standard	Standard
Transmission					
Drive System	2-wheel drive	2-wheel drive	2-wheel drive	2-wheel drive	2-wheel drive
Forward Speed	8.9 km/h (0-5.5 mph)	8.9 km/h (0-5.5 mph)	8.9 km/h (0-5.5 mph)	8.9 km/h (0-5.5 mph)	8.9 km/h (0-5.5 mph)
Reverse Speed	5.1 km/h (0-3.2 mph)	5.1 km/h (0-3.2 mph)	5.1 km/h (0-3.2 mph)	5.1 km/h (0-3.2 mph)	5.1 km/h (0-3.2 mph)
Speed & Direction Control	Foot pedal	Two pedal foot controlled hydro	Two pedal foot controlled hydro	Two pedal foot controlled hydro	Two pedal foot controlled hydro
Tyres					
Front Tyres	15x6-6	15x6-6	15x6-6	15x6-6	15x6-6
Rear Tyres	20x8.0-8	20x8.0-8	20x8.0-8	20x8.0-8	20x8.0-8
Seat					
Height	28 cm (11 in.)	28 cm (11 in.)	38 cm (15 in.)	38 cm (15 in.)	38 cm (15 in.)
Mower Deck					
Cutting Width	107 cm (42 in.)	107 cm (42 in.)	107 cm (42 in.)	107 cm (42 in.)	122 cm (48 in.)
Cutting Height	25 to 102 mm (1-4 in.)	25 to 102 mm (1-4 in.)	25 to 102mm (1-4 in.)	25 to 102mm (1-4 in.)	25 to 102mm (1-4 in.)
Discharge	Side	Side	Side	Side	Side
Mower Blades	Two	Two	Two	Two	Three
Collector					
Standard/Optional	Optional	Optional	Optional	Optional	Optional
Capacity					
PTO					
Type	Manual	Manual	Manual	Manual	Electric
Dimensions					
Overall Width	139 cm (54.7 in.)	139 cm (54.7 in.)	139 cm (54.7 in.)	139 cm (54.7 in.)	154 cm (60.6 in.)
Overall Length	175 cm (68.9 in.)	175 cm (68.9 in.)	175 cm (68.9 in.)	175 cm (68.9 in.)	176.5 cm (69.5 in.)
Height	102 cm (40.2 in.)	102 cm (40.2 in.)	113 cm (44.5 in.)	113 cm (44.5 in.)	113 cm (44.5 in.)
Weight	194 kg	175 kg	191 kg	191 kg	215 kg
Steering					
Steering Type					
Turning Radius	46 cm (18 in.)	46 cm (18 in.)	46 cm (18 in.)	46 cm (18 in.)	46 cm (18 in.)
Miscellaneous					
Cruise Control	No	No	Yes	Yes	No
Front Bumper	Optional	Optional	Optional	Standard	Optional
Steering Wheel	Standard	Standard	Standard	Standard	Standard
Bumper-to-Bumper Warranty	2 years/120hr limited warranty	2 years/120hr limited warranty	2 years/120hr limited warranty	2 years/120hr limited warranty	2 years/120hr limited warranty

Specifications

CATCHER SERIES



X147R



X167R



X350R

Engine	Briggs & Stratton	Briggs & Stratton	Kawasaki
Model			FS600V iTorque Power System
Horsepower	12.5 kW (16.5 hp)	12.9 kW (16.5 hp)	16.4 kW (21.5 hp)
Displacement	656 cm ³	656 cm ³	603 cm (36.8 cu in.)
Cylinders	V-twin, OHV	V-twin, OHV	V-twin
Oil Filter			
Lubrication	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter
Cooling	Air	Air	Air
Fuel System			
Fuel Type	Petrol	Petrol	Unleaded petrol
Fuel Tank Capacity	7.5 L	7.5 L	7.6 L (2.0 gal)
Fuel Indication	Yes	Yes	Yes
Fuel Filter	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line
Electrical System			
Battery Voltage	12 V	12 V	12 V
Capacity	15 amp, regulated	15 amp, regulated	15 amp, regulated
Hourmeter	Standard	Standard	Standard
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Drive System			
Forward Speed	8.9 km/h	8.9 km/h	8.5 km/h
Reverse Speed	5.1 km/h	5.1 km/h	6.4 km/h
Speed & Direction Control	Two pedal foot controlled hydro	Two pedal foot controlled hydro	Twin Touch™ Hydrostatic
Tyres	Turf	Turf	
Front Tyres	15x6-6	15x6-6	15x6-6
Rear Tyres	18x8.5-8	18x8.5-8	20x10-8
Seat	Standard	Standard high back	Open back
Height			38.1 cm (15 in.)
Mower Deck			
Cutting Width	92 cm (36 in.)	107 cm (42 in.)	107 cm (42 in.)
Cutting Height	25 to 90 mm (1-3.5 in.)	25 to 102 mm (1-4 in.)	25 to 102mm (1-4 in.)
Discharge	Rear	Rear	Rear
Mower Blades			Two
Collector			
Standard/Optional	Standard	Standard	Standard
Capacity	300 L	300 L	300 L
PTO			
Type	Electric clutch	Electric clutch	Electric clutch
Dimensions			
Overall Width	122.7 cm (wheelbase)	122.7 cm (wheelbase)	125 cm (49.4 in.)
Overall Length	247.5 cm	252.7 cm	251.4 cm
Height	108 cm (42.5 in.)	114 cm (44.8 in.)	109.2cm (43 in.)
Weight	233 kg	230 kg	293 kg (w/42 in. mower)
Steering			
Steering Type	2-wheel steer	2-wheel steer	Low effort, 2-wheel steer
Turning Radius	50.8 cm (20 in.)	50.8 cm (20 in.)	42 cm (16.5 in.)
Miscellaneous			
Cruise Control	No	Yes	Yes
Front Bumper	Optional	Standard	Optional
Steering Wheel	Standard	Standard	Standard
Bumper-to-Bumper Warranty	2 years/120hr limited warranty	2 years/120hr limited warranty	4 years/300hr limited warranty

Specifications

300 SERIES

500 SERIES

X350



X350M



X380



X384 4WS



X570



Engine	Kawasaki	Kawasaki	Kawasaki	Kawasaki	Kawasaki
Model	FS600V iTorque Power System	FS600V iTorque Power System	FS651V iTorque Power System	FS651V iTorque Power System	FS730 iTorque Power System
Horsepower	13.8 kW (21.5 hp)	13.8 kW (21.5 hp)	17.2 kW (23 hp)	17.2 kW (23 hp)	17.9 kW (24 hp)
Displacement	603 cc (36.8 cu. in.)	603 cc (36.8 cu. in.)	726 cc (44.3 cu. in.)	726 cc (44.3 cu. in.)	726 cc (44.3 cu. in.)
Cylinders	V-twin	V-twin	V-twin	V-twin	V-twin
Oil Filter	Yes	Yes	Yes	Yes	Yes
Lubrication	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter	Full pressure with replaceable oil filter
Cooling	Air	Air	Air	Air	Air
Fuel System					
Fuel Type	Petrol	Petrol	Petrol	Petrol	Petrol
Fuel Tank Capacity	12.5 L (3.3 gal)	12.5 L (3.3 gal)	12.5 L (3.3 gal)	12.5 L (3.3 gal)	16.7 L (4.4 gal)
Fuel Indication	Yes	Yes	Yes	Yes	Yes
Fuel Filter					
Electrical System					
Battery Voltage	12 V	12 V	12 V	12 V	12 V
Capacity	15 amp, regulated	15 amp, regulated	15 amp, regulated	15 amp, regulated	15 amp, regulated
Hourmeter					Standard
Transmission					
Drive System	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Forward Speed	8.9 km/h	8.9 km/h	10 km/h	9.5 km/h	11.6 km/h
Reverse Speed	6.4 km/h	6.4 km/h	5.6 km/h	5.6 km/h	8.4 km/h
Speed & Direction Control	Twin Touch™ Hydrostatic	Twin Touch™ Hydrostatic	Twin Touch™ Hydrostatic	Twin Touch™ Hydrostatic	Twin Touch™ Hydrostatic
Tyres					
Front Tyres	15x6-6	15x6-6	15x6-6	15x6-6	15x5-8
Rear Tyres	20x10-8	20x10-8	22x11-10	20x10-8	24x12-12
Seat					
Height	Open-back design	Open-back design	Open-back design	Open-back design	Open-back design
Mower Deck					
Cutting Width	Accel Deep™	Accel Deep™	Accel Deep™	Accel Deep™	Accel Deep™
Cutting Height	106.7 cm (42 in.) 121.9 cm (48 in.)	106.7 cm (42 in.) (Mulch)	122 cm (48 in.) 137 cm (54 in.)	122 cm (48 in.)	122 cm (48 in.) 137 cm (54 in.)
Discharge	25.4 to 102 mm (1-4 in.)	25.4 to 102 mm (1-4 in.)	25.4 to 102 mm (1-4 in.)	25.4 to 102 mm (1-4 in.)	25.4 to 102 mm (1-4 in.)
Mower Blades	Side	Side	Side	Side	Side
PTO					
Type	(42 in.) two/(48 in.) three	(42 in.) two/(48 in.) three	Two	(48 in.) three/(54 in.) three	Three
Dimensions					
Overall Width	Electric clutch	Electric clutch	Electric clutch	Electric clutch	Electric clutch
Overall Length					
Height	125.5 cm (49.4 in.)	125.5 cm (49.4 in.)	125.5 cm (49.4 in.)	125.5 cm (49.4 in.)	125.5 cm (49.4 in.)
Weight	182.9 cm (72 in.)	182.9 cm (72 in.)	182.9 cm (72 in.)	182.9 cm (72 in.)	191 cm (75 in.)
Steering					
Steering Type	115.6 cm (45.5 in.)	115.6 cm (45.5 in.)	109.2 cm (43 in.)	109.2 cm (43 in.)	109.2 cm (43 in.)
Turning Radius	246 kg (w/48 in. mower) 275 kg (w/54 in. mower)	246 kg (w/48 in. mower) 275 kg (w/54 in. mower)	295 kg (w/48 in. mower) 299 kg (w/54 in. mower)	295 kg (w/48 in. mower) 299 kg (w/54 in. mower)	318 kg (w/48 in. mower)
Miscellaneous					
Cruise Control	Low effort, 2-wheel steer	Low effort, 2-wheel steer	Low effort, 2-wheel steer	Low effort, 2-wheel steer	Low effort, 2-wheel steer
Front Bumper	40.6 cm (16 in.)	40.6 cm (16 in.)	40.6 cm (16 in.)	42 cm (16.5 in.)	40.6 cm (16 in.)
Storage Compartment	Yes	Yes	Yes	Yes	Yes
Steering Wheel	Standard	Standard	Standard	Standard	Standard
Bumper-to-Bumper Warranty	4 years/300hr limited warranty	4 years/300hr limited warranty	4 years/300hr limited warranty	4 years/300hr limited warranty	4 years/500hr limited warranty

Specifications

500 SERIES

700 SERIES

X580



X590



X750



X758



Engine	Kawasaki	Kawasaki	Yanmar	Yanmar
Model	FS730 iTorque Power System	JFS730V-EFI iTorque Power System	3-cylinder	3-cylinder
Horsepower	17.9 kW (24 hp)	19.0 kW (25.5 hp)	11.9 kW (24 hp)	11.9 kW (24 hp)
Displacement	726 cc (44.3 cu. in.)	726 cc (44.3 cu. in.)	933 cc (56.9 cu. in.)	933 cc (56.9 cu. in.)
Cylinders	V-twin	V-twin	3	3
Oil Filter	Yes	Yes	Yes	Yes
Lubrication	Full pressure with replaceable oil filter		Full pressure, 1.9L	Full pressure, 1.9L
Cooling	Air	Air	Liquid	Liquid
Fuel System				
Fuel Type	Petrol	Petrol	Diesel	Diesel
Fuel Tank Capacity	16.7 L (4.4 gal)	16.7 L (4.4 gal)	19.7 L (5.2 gal)	19.7 L (5.2 gal)
Fuel Indication	Yes	Yes	Yes	Yes
Electrical System				
Battery Voltage	12 volts	12 volts	12 volts	12 volts
Capacity	15 amp, regulated	15 amp, regulated	40 amp, regulated	40 amp, regulated
Hourmeter	Standard	Standard	Standard	Standard
Transmission	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Drive System			2-wheel drive	4-wheel drive
Forward Speed	11.6 km/h (7.2 mph)	11.6 km/h (7.2 mph)	13.7 km/h (8.5 mph)	13.7 km/h (8.5 mph)
Reverse Speed	8.4 km/h (5.2 mph)	8.4 km/h (5.2 mph)	9.7 km/h (6 mph)	9.7 km/h (6 mph)
Speed & Direction Control	Twin Touch™ Hydrostatic	Twin Touch™ Hydrostatic	Twin Touch™ Hydrostatic	Twin Touch™ Hydrostatic
Tyres	Turf/heavy duty all purpose (rear only)	Turf/heavy duty all purpose (rear only)	Turf	Heavy duty all purpose
Front Tyres	16x6.5-8	16x6.5-8	18x8.50-8	18x8.50-8
Rear Tyres	24x12-12 HDAP	24x12-12	26x12-12	26x12-12
Seat	Open-back design	High back		
Height	38.1 cm (15 in.)	53.3 cm (21 in.)	53.3 cm (21 in.)	53.3 cm (21 in.)
Mower Deck	Accel Deep™	Accel Deep™		
Cutting Width	122 cm (48 in.) 137.2 cm (54 in.)	121.9 cm (48 in.), or 137.2 cm (54 in.)	137.2 cm (54 in.) 152.4 cm (60 in.)	137.2 cm (54 in.) 154.4 cm (60 in.)
Cutting Height	25.4 to 102 mm (1-4 in.)	25.4 to 102 mm (1-4 in.)	25.4 to 102 mm (1-4 in.)	25.4 to 102 mm (1-4 in.)
Discharge	Side	Side	Side	Side
Mower Blades	Three	Three	Three	Three
PTO				
Type	Electric clutch	Electric clutch	Hydraulic clutch	Hydraulic clutch
Dimensions				
Overall Width	125.5 cm (49.4 in.)	130 cm (51.2 in.)	138.4 cm (54.5 in.)	141.5 cm (55.7 in.)
Overall Length	201 cm (79 in.)	201 cm (79 in.)	190.5 cm (75 in.)	190.5 cm (75 in.)
Height	109.2 cm (43 in.)	132.1cm (52 in.)	130 cm (51.2 in.)	130 cm (51.2 in.)
Weight	318 kg (w/48 in. mower)	362 kg (w/48 in. mower) 365 kg (w/54 in. mower)	530 kg (w/54 in. mower)	571 kg (4/54 in. mower)
Steering				
Steering Type	Power, 2-wheel steer	Power, 2-wheel steer	Power, 2-wheel steer	Power, 2-wheel steer
Turning Radius	55.9 cm (22 in.)	55.9 cm (22 in.)	63.5 cm (25 in.)	63.5 cm (25 in.)
Miscellaneous				
Cruise Control	Yes	Yes	Yes	Yes
Front Bumper			Optional	Optional
Storage Compartment	Yes	Yes	Yes	Yes
Steering Wheel	Standard	Tilting Steering Wheel, 5 positions	Standard	Standard
Bumper-to-Bumper Warranty	4 years/500 hr limited warranty	4 years/500 hr limited warranty	4 years/700 hr limited warranty	4 years/700 hr limited warranty

Specifications

ZTRAK SERIES

Z335E



Z355E



Z515E



Z530M



Z545R



	Z335E	Z355E	Z515E	Z530M	Z545R
Engine	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton
Model	M40 Intek	M44 Intek	M44 ELS	M44 Cyclonic	FS730V
Horsepower	14.9 kW (20 hp)	16.4 kW (22 hp)	17.9 kW (24 hp)	17.9 kW (24 hp)	18.6 kW (25 hp)
Displacement	656 cc (40.0 cu. in.)	724 cc (44.2 cu. in.)	724 cc (44.2 cu. in.)	724 cc (44.3 cu. in.)	726 cc (44.3 cu. in.)
Cylinders	V-twin	V-twin	V-twin	V-twin	V-twin
Oil Filter	Yes	Yes	Yes	Yes	Yes
Lubrication	Full pressure, 1.9L	Full pressure, 1.9L	Full pressure, 1.9L	Full pressure, 2.1L	Full pressure, 2.1L
Cooling	Air	Air	Air	Air	Air
Fuel System					
Fuel Type	Petrol	Petrol	Petrol	Petrol	Petrol
Fuel Tank Capacity	8 L (2.1 gal)	8 L (2.1 gal)	17 L (4.5 gal)	17 L (4.5 gal)	17 L (4.5 gal)
Fuel Indication	Yes	Yes	Sight window	Sight window	Sight window
Fuel Filter					
Electrical System					
Battery Voltage	12 V	12 V	12 V	12 V	12 V
Capacity	15 amp, regulated	15 amp, regulated	15 amp, regulated	15 amp, regulated	15 amp, regulated
Hourmeter	Standard	Standard	Standard	Standard	Standard
Transmission	Hydro-Gear	Hydro-Gear	Tuff Torq	Turf Torq	Turf Torq
Drive System	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Hydro-Gear EZT w/1-in. (2.5 cm) axles	Tuff Torq TZX7-U w/1-in. (2.5 cm) axles	Tuff Torq TZX7-U w/1-in. (2.5 cm) axles	Tuff Torq TZX7-M w/1-in. (2.5 cm) axles
Forward Speed	11.3km/h (7 mph)	11.3km/h (7 mph)	13.7km/h (8.5 mph)	13.7km/h (8.5 mph)	13.7km/h (8.5 mph)
Reverse Speed	5.6 km/h (3.5 mph)	5.6 km/h (3.5 mph)	6.4 km/h (4 mph)	6.4 km/h (4 mph)	6.4 km/h (4 mph)
Speed & Direction Control	Twin levers	Twin levers	Twin levers	Twin levers	Twin levers
Tyres					
Front Tyres	11x4.0-4	11x4.0-4	13x5.0-6	13x5.0-6	13x5.0-6
Rear Tyres	18x8.50-8	18x8.50-8	22x9.50-10	22x9.50-10	22x9.50-10
Seat					
Height	38.1 cm (15 in.)	38.1 cm (15 in.)	38.1 cm (15 in.)	45.7 cm (18 in.)	45.7 cm (18 in.)
Mower Deck					
Cutting Width	107 cm (42 in.)	121.9 cm (48 in.)	121.9 cm (48 in.) 137 cm (54 in.)	121.9 cm (48 in.) 137 cm (54 in.)	137 cm (54 in.)
Cutting Height	25.4 to 102 mm (1-4 in.)	25.4 to 102 mm (1-4 in.)	25.4 to 102mm (1-4 in.)	25.4 to 102mm (1-4 in.)	25.4 to 102mm (1-4 in.)
Discharge	Side	Top	Side	Side	Side
Mower Blades	Two	Three	Three	Three	Three
PTO					
Type	Electric, 105 lb-ft	Electric, 105 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft	Electric, 125 lb-ft
Dimensions					
Overall Width	121 cm (47.95 in.)	127 cm (50.3 in.)	123.7 cm (48.7 in.)	123 cm (48.7 in.)	123 cm (48.7 in.)
Overall Length	183.5 cm (72.2 in.)	183.5 cm (72.2 in.)	194.8 cm (76.7 in.)	194.8 cm (76.7 in.)	194.8 cm (76.7 in.)
Height	92.2 cm (36.3 in.)	92.2 cm (36.3 in.)	100.1 cm (39.4 in.)	106.7 cm (42 in.)	106.7 cm (42 in.)
Weight	223 kg	230 kg	279 kg (w/48 in. mower) 286 kg (w/54 in. mower)	279 kg (w/48 in. mower) 286 kg (w/54 in. mower) 312 kg (w/62 in. mower)	289 kg (w/48 in. mower) 297 kg (w/54 in. mower) 312 kg (w/62 in. mower)
Steering					
Steering Type	Twin levers	Twin levers	Twin levers	Twin levers	Twin levers
Turning Radius	0 cm	0 cm	0 cm	0 cm	0 cm
Miscellaneous					
Cruise Control	No	No	No	No	No
Front Bumper	No	No	No	No	No
Storage Compartment	Yes	Yes	Yes	Yes	Yes
Steering Wheel	Twin levers	Twin levers	Twin levers	Twin levers	Twin levers
Bumper-to-Bumper Warranty	2 years/120hr limited warranty	2 years/120hr limited warranty	2 years/120hr limited warranty	4 years/300hr limited warranty	4 years/300hr limited warranty

Specifications

Z700 SERIES



Z720E

Z900 SERIES



Z915E

Engine	Kawasaki	Kohler
Model	FR691V	FS730V
Horsepower	17.2 kW (23 hp)	17.9 kW (24 hp)
Displacement	726 cc (44.3 cu. in.)	726 cc (44.3 cu. in.)
Cylinders	V-twin	V-twin
Oil Filter	Yes	Yes
Lubrication	Full pressure, 1.9L	Full pressure, 1.9 L
Cooling	Air	Air
Fuel System		
Fuel Type	Petrol	Petrol
Fuel Tank Capacity	30 L (8 gal)	30.2 L (8 gal)
Fuel Indication	Yes	Yes
Electrical System		
Battery Voltage		12 volts
Capacity		15 amp, regulated
Hourmeter		Standard
Transmission	Dual Hydro-Gear	Dual Hydro-Gear
Drive System	Hydro-Gear ZT-3100	Hydro-Gear ZT-3200
Forward Speed	12.8km/h (8 mph)	15.3 km/h (9.5 mph)
Reverse Speed	6 km/h (3.8 mph)	6.4 km/h (9.5 mph)
Speed & Direction Control	Twin levers	Twin Levers
Tyres		Turf/heavy duty all purpose (rear only)
Front Tyres	13x6.5-6	13x6.5-6
Rear Tyres	23x9.5-12	23x10.5-12
Seat		
Height	53 cm (21 in.)	57.1 cm (22.5 in.)
Mower Deck		Accel Deep™
Cutting Width	121.9 cm (48 in.) 137 cm (54 in.)	137 cm (54 in.), 152 cm (60 in.)
Cutting Height	38 to 127mm (1.5-5 in.)	38 to 127 mm (1.5-5 in.)
Discharge	Side	Side
Mower Blades	Three	Three
PTO		
Type	Electric, 125 lb-ft	Electric, 125 lb-ft
Dimensions		
Overall Width	123.5 cm (48.6 in.)	128.4cm (50.6 in.)
Overall Length	204.6 cm (80.6 in.)	208 cm (82 in.)
Height	182.2cm (71.1 in.)	182.2 cm (71.1 in.)
Weight	431 kg (w/48 in. mower) 437 kg (w/54 in. mower)	437 kg (w/54 in. mower) 451 kg (w/62 in. mower)
Steering		
Steering Type	Twin levers	Twin levers
Turning Radius	0 cm	0 cm
Miscellaneous		
Cruise Control	No	No
Front Bumper	No	No
Storage Compartment	Yes	Yes
Steering Wheel	Twin levers	Twin levers
Bumper-to-Bumper Warranty	4 years/500hr limited warranty	4 years/750 hr limited warranty



*The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only.

Actual operating horsepower and torque will be less. Refer to the engine manufacturer's website for additional information.

^Term limited to years or hours used, whichever comes first, and varies by model. See your local branch for more information on the Limited Warranty for New John Deere Turf & Utility Equipment.

Ask us about specifications for our Easy Order ZTrak models!

0800 432 633
www.dne.co.nz



While all care has been taken with the accuracy of this brochure, it is subject to errors and omissions.

Product features are based on published information at the time of publication (2021), and are subject to change without notice. Some models subject to availability. Images used are for example only and may differ to what is available instore. Please contact your local branch for more information.

ASHBURTON	832 East Street	Ph: 03 307 9911
BLENHEIM	4 Warwick Street	Ph: 03 579 1111
CHRISTCHURCH	799 Jones Road, Rolleston	Ph: 03 349 4883
GREYMOOUTH	3 Charles O'Connor Street	Ph: 03 768 5116
KAIKOURA	85a Beach Road	Ph: 03 319 7119
NELSON	70 Gladstone Road, Richmond	Ph: 03 543 8041
OAMARU	1 Main North Road	Ph: 03 437 1111
TIMARU	40 Racecourse Road	Ph: 03 687 4005

DE DRUMMOND
& ETHERIDGE

0800 432 633
www.dne.co.nz